

HH – 2310 Series

SkyLine Grab Bar – 24"

Stainless steel screws for wood backing and 4 hollow wall togglers included with every bar!

SkyLine
 Grab Bar
 24"

Application Use:

Architectural

Commercial

Institutional

Residential

Specifications

The SkyLine Grab Bar is manufactured using high quality 18 gauge 1.25" diameter 304 stainless steel. The convenient mounting flange post with set screws allow for easy flange access during installation yet preserving the clean finished look of the concealed flange cover. It is preferable to use the included 2" wood screws to mount the flanges to wood blocking; however (4) hollow wall "BB" Toggles are included with each accessory. Each toggle is rated at 265 lbs. tensile pull-out value when installed properly through ½" drywall (2 Toggles per flange). The Bilanx bathing collection is designed, built, and tested to 500lbs. exceeding HUD, FHA, VA, ADA, ANSI, and other federal, provincial, and local codes. *Grab bars can only be as strong as what they are mounted to. It is imperative when installing any safety product to consult with a qualified contractor to insure you have sufficient backing.



The Bilanx Bathing Collection

All SkyLine Grab Bars ship complete with easy to follow instructions, mounting hardware for stud framing and hollow walls. The Bilanx Bathing Collection has been designed, built and tested to 500lbs.


The SkyLine Grab Bar comes in 3 standard finishes.

HH-2310PS POLISHED STAINLESS


HH-2310BS BRUSHED STAINLESS

HH-2310ORB OIL RUBBED BRONZE

Custom Finishes Available Upon Request

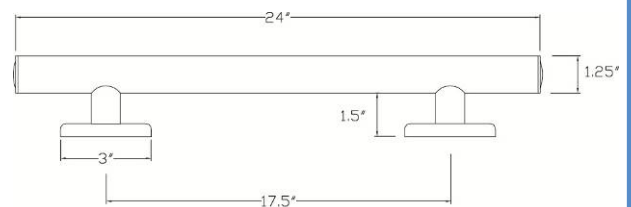

Easy to mount flange!
 3 Set Screws on post allow pre-mounting
 to the wall before attaching the bar.



Dimension tolerances +/- 3/16"