


# MODEL: LB3S26333A75FTB.V3\*


\*ALL ACCESSORIES OPTIONAL




SEE OVER

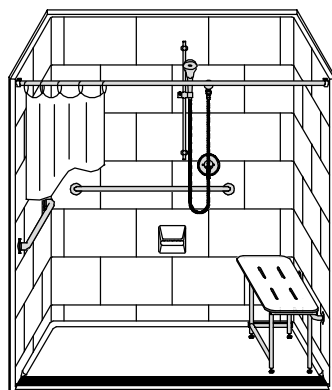

PERSPECTIVE VIEW - N.T.S.  
MODEL SHOWN HERE AS:  
RIGHT PLUMBING  
RIGHT SEAT

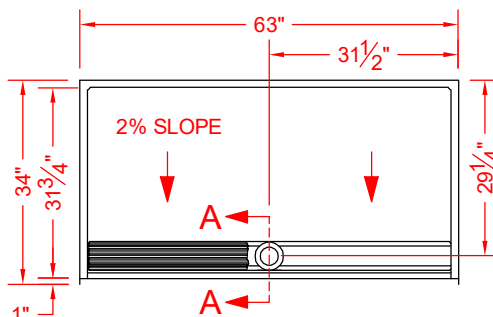

TOP VIEW - SCALE:  $\frac{3}{8}$ " = 1'-0"

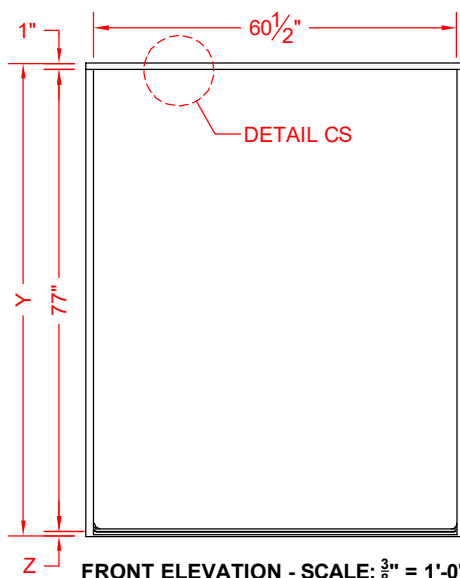

FRONT ELEVATION - SCALE:  $\frac{3}{8}$ " = 1'-0"

## Features:

- ADA compliant single-piece roll-in shower with trench drain and stainless steel grate
- Molded, one-piece gelcoat/fiberglass shower module
- "Subway Tile", 12" x 18" simulated tile wall finish, white (standard)
- Integral full plywood backing for strength and unlimited accessory placement
- Available in various threshold heights
- On all threshold heights 1-1/4" or shorter, no mud set is required, and an anchoring adhesive kit is supplied
- On all threshold heights 1-1/2" or taller, mud set is required

## \*OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST

MODEL #	UNIT THRESHOLD HEIGHT	
	Y	Z*
LB3S26333A75FTB.V3	78-3/4"	3/4" MIN
LB3S26333A2FTB.V3	80"	2" TYP

\* - SEE BACK FOR DETAIL SECTIONS

## PRODUCT SPECIFICATIONS:

- Single-piece shower module shall be constructed of gelcoat/fiberglass with full integral plywood backing and a stainless steel trench drain grate
- Rough-In: Stud opening +1/4" / -0" nominal dimensions.

C.S.I. FORMAT SPECIFICATION TEXT AVAILABLE

## PRODUCT INFORMATION:

- Accessories: Polished chrome/satin stainless standard, others available.
- Colors: White as standard, others to match any major fixture manufacturer, also available with sprayable solid surface in many colors
- Custom curb heights, other than shown, are available (between min. and max.)

## OPTIONAL ACCESSORIES:

### INSTALLED AT FACTORY:

- Seat, folding
- Grab bar
- Soap dish
- Mixing valve, pressure-balancing, lever handle, pre-plumbed tree to supply elbow
- Curtain rod brackets

### INSTALLED BY OTHERS:

- Curtain and rod
- Trench grate and No-caulk brass drain (INCLUDED)

## CODES:

- Designed and manufactured in compliance with the following standards and codes:
- ANSI Z124.2 Standards for Plastic Shower
- ADA Accessibility Guidelines for Buildings and Facilities
- ANSI A117.1 A - Accessible and Usable Buildings and Facilities
- ANSI A117.1 B - Accessible and Usable Buildings and Facilities
- IPC International Plumbing Code
- UPC Uniform Plumbing Code



## NOTICE OF LIMITATION:

- Recess as needed to meet code
- Adhere to floor as required
- Recess as needed for trench, see page 2





We reserve the right to make revisions without notice in the design of fixtures or in packaging unless this right has specifically been waived at the time the order is accepted.

# □ LB3S26333A75FTB.V3

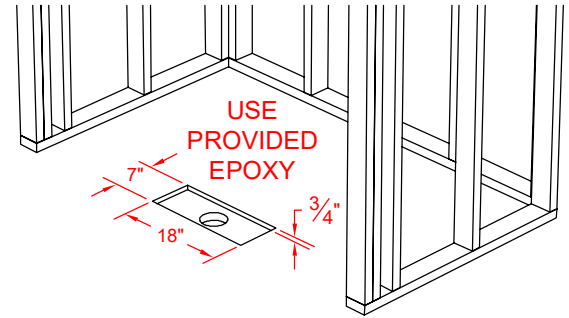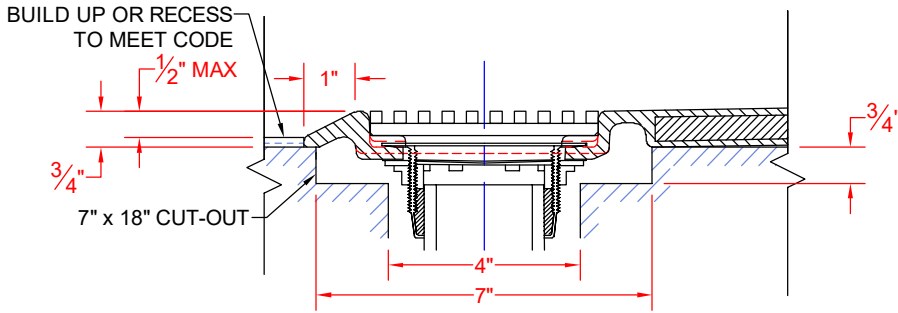

FOR MODELS ENDING IN A75FT\*.V3,  
INSTALLATION REQUIRES A 7" x 18" x 3/4" CUT-OUT.

# □ LB3S26333A2FTB.V3

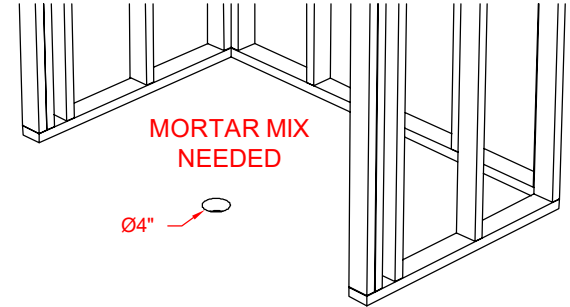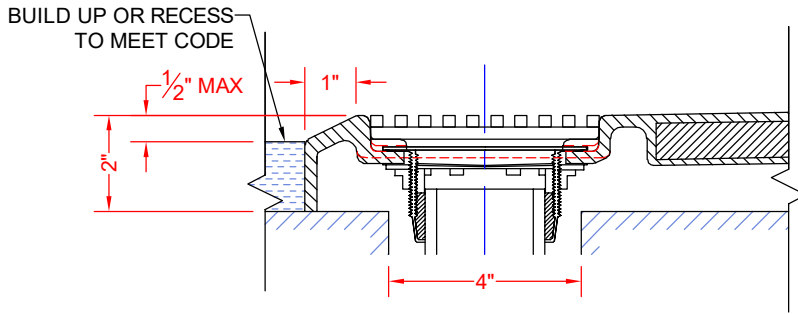


FOR MODELS ENDING IN A15FT\*.V3, A17FT\*.V3, OR A2FT\*.V3,  
INSTALLATION REQUIRES A 4" DRAIN HOLE.

SECTION A-A - SCALE: 3" = 1'-0"

SECTION A-A - SCALE: 3" = 1'-0"

**\*\*OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST\*\***

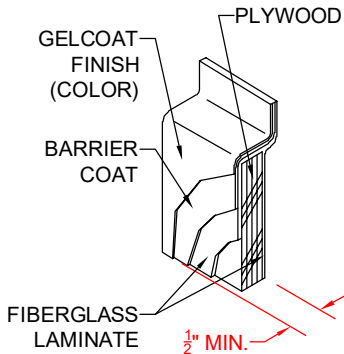

DETAIL CS - SCALE: N.T.S.  
CROSS SECTION DETAIL